



SUPERSEALERS

HOT AIR BAG SEALERS, BAND BAG SEALERS AND BAG COMPRESSION AND BAG SEALING SYSTEMS

T-PAK 550 HIGH SPEED BAG SEALING SYSTEM

The T-PAK 550 Bag Compression and Bag Sealing System is a high quality system for increasing bag handling and sealing output. The combination of a heavy duty conveyor system with a full width compression belt and the Band Supersealer Platform or Hot Air Supersealer Platform makes this an unchallenged heat sealing system for many applications, superior in performance and speed with low maintenance cost.

TECHNICAL SPECIFICATIONS:



Bag size range:	All bag sizes
Standard features:	Product placement on the main conveyor is aided by a guide and bag top guide
Finish:	Powder coating standard, stainless steel optional
Speed:	Variable to match Supersealer
Machine handling:	Right to left or left to right
Electric:	110 VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp or to requirement CE components
Pneumatic:	Not required for standard configuration Required for optional jet flow trim remover
Belt length:	10' or 3 meters. Other sizes on request
Belt width:	16" /406mm or 18" /457mm. Other sizes on request

T-PAK 750 HIGH SPEED BAG SEALING SYSTEM

The T-PAK 750 is a high quality concept in bag handling and sealing technology. The combination of an angled bed conveyor system with the Band Supersealer Platform or Hot Air Supersealer Platform makes this an unchallenged heat sealing system for many applications, superior in performance and speed with low maintenance cost.

TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Standard features:	Product placement on the main conveyor is aided by a back belt and bag top guide
Finish:	Powder coating standard, stainless steel optional
Speed:	Variable to match Supersealer
Machine handling:	Right to left or left to right
Electric:	110 VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp or to requirement CE components
Pneumatic:	Not required for standard configuration Required for optional jet flow trim remover
Belt length:	10' or 3 meters. Other sizes on request
Belt width:	16" /406mm or 18" /457mm. Other sizes on request

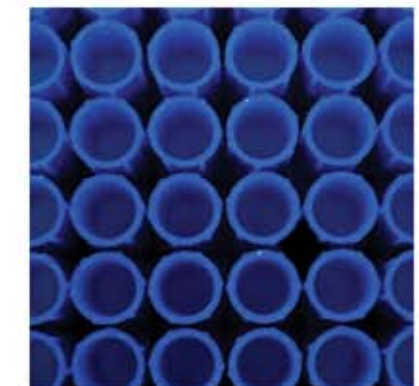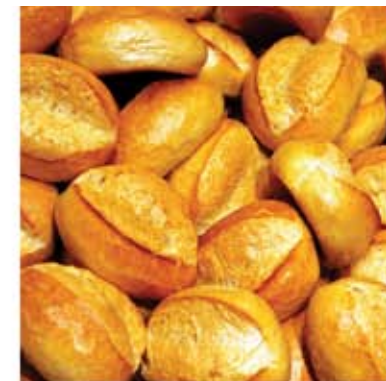



SUPERSEALER SB10/SB20 ROTARY BAND SEALER

The Supersealer SB10/SB20 Band Sealer continuously seals a wide range of bag materials at high speed and efficiency. The heavy duty SB10 painted and SB20 stainless steel construction in combination with proven band sealing technology and operator friendly controls ensures continuous duty performance in demanding applications.

TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material range:	Heat sealable materials up to 24 mils
Speed:	Up to 65 fpm or 20 mpm
Seal width:	5/16" or 8mm
Machine handling:	Right to left or left to right
Electric Requirements:	110 VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp CE marked

FEATURES:

No tool band change over:	Easy to maintain
Variable speed:	Ease of matching conveyor speeds and flexibility
Closed loop PID temperature control:	Accurate and consistent sealing temperature
Motorized pedestal:	With a touch of a button, for height adjustments, simplifying multiple bag/pouch applications

BENEFITS:

No tool band change over:	Easy to maintain
Variable speed:	Ease of matching conveyor speeds and flexibility
Closed loop PID temperature control:	Accurate and consistent sealing temperature
Motorized pedestal:	With a touch of a button, for height adjustments, simplifying multiple bag/pouch applications

SUPERSEALER SB30 ROTARY BAND SEALER

TECHNICAL SPECIFICATIONS: * Also available: Supersealer MBS Medical Sealer

Bag size range:	All bag sizes
Bag material range:	Heat sealable materials up to 40 mils or 1000 microns
Speed:	Up to 100 fpm or 30 mpm
Seal width:	7/16" or 11mm
Machine handling:	Right to Left or left to right
Electric:	110 VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp CE marked
Stainless steel Finish:	Outside and inside components



Explosion Proof SB30 with optional M-500 conveyor



Painted Supersealer base with casters & motorized pedestal and optional BBY-100 conveyor



Stainless Steel Supersealer base with casters & motorized pedestal and optional BBY-100 conveyor



Stainless Steel Supersealer SB30 base with casters & electric pedestal and optional BBY-200 conveyor



Medical pouches

SUPERSEALER SS1/SS2 ROTARY HOT AIR BAG SEALER

The Supersealer SS1/SS2 Hot Air Bag Sealer utilizes hot air to continuously seal a wide range of bag materials at high speed and efficiency. The advanced airflow, sophisticated controls, and rugged painted or stainless construction ensures continuous uptime performance in all applications.

TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material:	Heat sealable materials up to 40 mils
Speed:	Up to 120 fpm or 36.5 mpm
Seal width:	1/4" or 6mm to 1/3 or 9mm plain or textured
Machine handling:	Right to left or left to right.
Electric requirements:	110 VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp CE marked

FEATURES:

Hot air sealing technology:	Optimum seal quality with low maintenance
Variable speed:	Ease of matching conveyor speeds and flexibility
Closed loop PID Temperature control:	Accurate and consistent sealing temperature
Motorized pedestal:	With a touch of a button, for height adjustments, simplifying multiple bag/pouch applications

BENEFITS:

Hot air sealing technology:	Optimum seal quality with low maintenance
Variable speed:	Ease of matching conveyor speeds and flexibility
Closed loop PID Temperature control:	Accurate and consistent sealing temperature
Motorized pedestal:	With a touch of a button, for height adjustments, simplifying multiple bag/pouch applications



Stainless Steel Supersealer SS4 base with casters & gas strut pedestal and optional M-500 Conveyor

SUPERSEALER SS4 ROTARY HOT AIR BAG SEALER

TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material range:	Heat sealable materials up to 40 mils or 1000 microns
Speed:	Up to 120 fpm or 36.5 mpm
Seal width:	1/4" or 6mm to 1/3 or 9mm plain or textured
Machine handling:	Right to Left or left to right
Electric:	110VAC, 1 Ph, 60 Hz, 10 Amp or 220 VAC, 1 Ph, 50 Hz, 7 Amp or to requirement CE marked
Stainless steel Finish:	Outside and inside components



Stainless Steel Supersealer SS4 base with casters & electric pedestal and optional M-500 Conveyor