



SUPERSEALER T-PAK 750



SUPERSEALER T-PAK 750

ANGLED BAGGING SYSTEM

Efficient & Operator Friendly

- CHOICE OF BAND OR HOT-AIR SEALING
- OPTIMUM SEAL QUALITY & AESTHETICS
- LOW MAINTENANCE
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION

The most customizable & reliable sealers on the market

The T-PAK 750 is an angled bed conveyor combined with a supersealer and optional T-PAK infeed, SST Trimmer and Trim Remover. This system is used in combination with automatic baggers or multi-operators on one line. It comes in stainless-steel and washdown configurations. The T-PAK 750 is designed for automatically sealing bags coming down a packing line or off an automatic bagging machine.



 WATCH OUR VIDEOS
& LEARN MORE AT:
OKSEALER.COM



TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Belt length:	10' or 3 meters (Other sizes upon req.)
Belt width:	16" (406mm) or 18" (457mm) (Other sizes upon request)
Speed:	Variable to match Supersealer
Machine handling:	Right to Left, or Left to Right
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic requirements:	Not required on standard config. Required with optional Jet Flow Trim remover.
Standard features:	Product placement on the main conveyor is aided by guide and bag top guide

FEATURES	BENEFITS
Supersealer bag sealer:	Superior performance for many years.
Semi-automatic bag presentation:	Optimum seal quality and aesthetics.
Full compression belt:	Removes excess air from the bags.
Modular design with individual frame on wheels:	Mobility and easy access for maintenance.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Dedusters:** Used in dusty environments to remove dust from seal areas.


Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE,
CONVEYOR & SEALER SPEED, AND SAVE
RECIPE SETTINGS FOR EASY BAG CHANGEOVER

OTHER AVAILABLE MODELS:



T-PAK 750 DRAWING

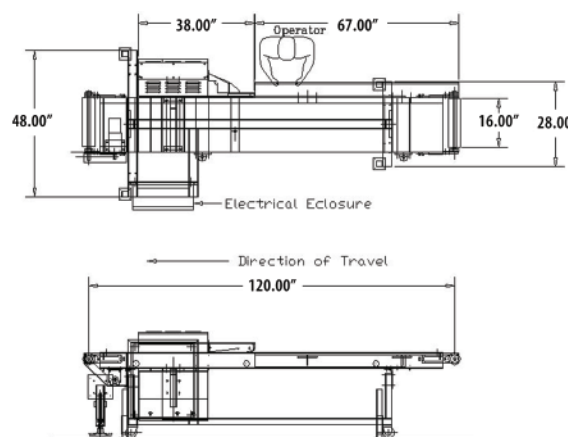

Drawing dimensions as reference ONLY.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

**WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM