



SUPERSEALER SB40



STAINLESS-STEEL SUPERSEALER SB40 HIGH-CAPACITY CONTINUOUS ROTARY BAND SEALER

High-capacity, high-output

- BAND SEALING TECHNOLOGY
- OPTIMUM SEAL QUALITY & AESTHETICS
- NO-TOOL BAND CHANGEOVER
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION

The most customizable & reliable sealers on the market

The Supersealer SB40 High-Capacity Rotary Band Sealer continuously seals a wide range of bag materials at a high-speed and efficiency. The sealer, is a high-quality band sealer that has four heating capsules, creating more heat to seal the bags. The machine will run up to 70ft/min and will seal materials up to 15 mils. Other outstanding sealer features include tool-less band changing, single point heating and cooling capsule adjustment, thermally isolated heat capsules, and digital temperature controls.



 WATCH OUR VIDEOS
& LEARN MORE AT:
OKSEALER.COM



TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material:	Heat sealable materials up to 15 mils
Speed:	Up to 70 ft/min (21.3 m/min)
Machine handling:	Right to Left, or Left to Right
Seal wheel width:	5/16" (8mm) standard 3/4" (19mm) optional
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic requirements:	Not required on standard config. Required with optional Jet Flow Trim remover.

FEATURES

BENEFITS

Variable speed:	Output can be increased or decreased through the touchpanel.
No tool band change-over:	Easy to maintain.
Easy lift front cover:	On-top access to all components means faster maintenance.
Motorized pedestal with locking swivel casters:	Sealer is raised and lowered for easy bag changeover and system mobility.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Air Evacuation/Gas Flush:** Bags sealed with this system extend the shelf life, and/or reduce the volume for packaging.
- **Conveyors:** Designed to meet all application requirements.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Washdown/Corrosive Sealer:** Match any environment (IP65/IP69K available).
- **Dedusters:** Used in dusty environments to remove dust from seal areas.

OTHER AVAILABLE MODELS:



SUPERSEALER SB20 ROTARY BAND SEALER

SB20 (Right to Left config.) with casters and motorized pedestal. Equipped with optional BBY100 Conveyor on a motorized pedestal.

SUPERSEALER SB30 HEAVY-DUTY BAND SEALER


SB30 (Left to Right Config.) with casters & motorized pedestal. Equipped with optional BBY200 Conveyor.



Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE, CONVEYOR & SEALER SPEED, AND SAVE RECIPE SETTINGS FOR EASY BAG CHANGEOVER

Supersealer SB40 with Electric Stand drawing.

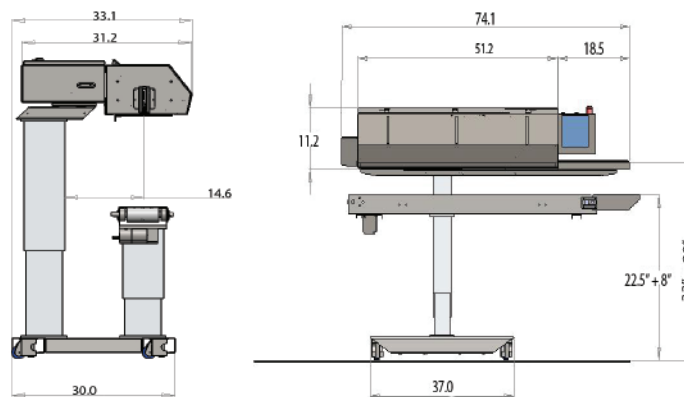

Drawing dimensions as reference ONLY.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM