



HIGH-CAPACITY CONTINUOUS ROTARY BAND SEALER

- HOT-AIR SEALING TECHNOLOGY
- SS4 HEAVY-DUTY CONSTRUCTION
- LOW MAINTENANCE
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION

The Supersealer SS4, Stainless Steel High-Capacity Hot-Air Sealer, is designed to operate in tough industrial applications and demanding environments. With years of field experience and customer input, the SS4 sealing machine is built to provide superior bag sealing efficiency and reliability. The sealer has eight heating capsules, transferring more heat to seal the bags. The machine will run up to 80ft/min and will seal materials up to 10 mils.





TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material:	Heat sealable materials up to 10 mils
Speed:	Up to 80 ft/min (24.4 m/min)
Machine handling:	Right to Left, or Left to Right
Seal wheel width:	1/4" (6mm) standard 3/8" (9mm) optional
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic requirements:	Minimum 3 psi clean dry air

FEATURES

BENEFITS

Variable speed:	Output can be increased or decreased through the touchpanel.
Closed Loop PID Temperature Control:	Accurate and consistent sealing temperature.
Easy lift front cover:	On-top access to all components means faster maintenance.
Motorized pedestal with locking swivel casters:	Sealer is raised and lowered for easy bag changeover and system mobility.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Air Evacuation/Gas Flush:** Bags sealed with this system extend the shelf life, and/or reduce the volume for packaging.
- **Conveyors:** Designed to meet all application requirements.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Washdown/Corrosive Sealer:** Match any environment (IP65/IP69K available).
- **Dedusters:** Used in dusty environments to remove dust from seal areas.

OTHER AVAILABLE MODELS:



SUPERSEALER SB20 ROTARY BAND SEALER

SB20 (Right to Left config.) with casters and motorized pedestal. Equipped with optional BBY100 Conveyor on a motorized pedestal.

SUPERSEALER SB30 HEAVY-DUTY BAND SEALER


SB30 (Left to Right Config.) with casters & motorized pedestal. Equipped with optional BBY200 Conveyor.



Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE, CONVEYOR & SEALER SPEED, AND SAVE RECIPE SETTINGS FOR EASY BAG CHANGEOVER

Supersealer SS4 with Electric Stand drawing.

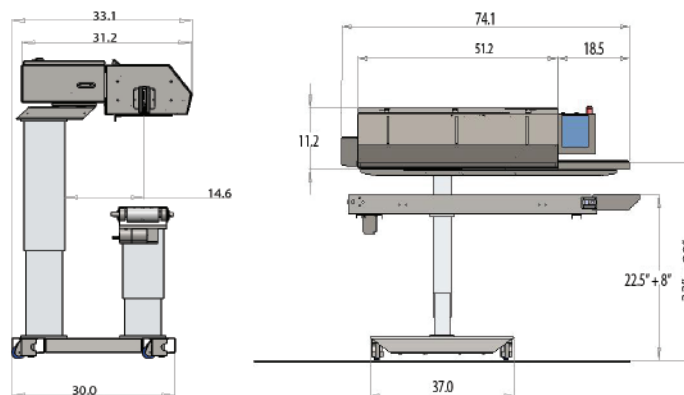

Drawing dimensions as reference ONLY.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM