



SUPERSEALER T-PAK 550WD



SUPERSEALER T-PAK 550WD

WASHDOWN BAG SEALING SYSTEM

Compress the Bag, and Get the Perfect Seal

The T-PAK 550 Washdown Bag Compression and Sealing System is a high quality system for increasing bag handling and sealing output. Industries such-as meat, poultry, and ready-to-eat foods require their end-of-line packaging equipment to support a sanitization environment. The T-PAK 550 Washdown is a semi-automatic bagging system constructed from corrosion-resistant stainless-steel. Combined with a heavy-duty conveyor system with a full width compression belt, and a Band Supersealer or Hot-Air Supersealer, this heat sealing system is unchallenged in many applications. Superior performance and speed with low maintenance cost.

High Quality & Efficient

- WASHDOWN STAINLESS-STEEL
- CHOICE OF HOT-AIR, OR BAND SEALER
- OPTIMUM SEAL QUALITY & AESTHETICS
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION



 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM



TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Standard features:	Product placement on the main conveyor is aided by a guide and bag top guide
Machine handling:	Right to Left, or Left to Right
Speed:	Variable to match Supersealer
Finish:	Powder coating standard, stainless-steel optional
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked, IP65
Pneumatic requirements:	Not required on standard config. Required for optional Jet Flow Trim remover.
Belt length:	10' or 3 meters (Others upon request)
Belt width:	16" (406mm) or 18" (457mm) (Others upon request)

OTHER AVAILABLE MODELS:

T-PAK 550 SUPERSEALER BAGGING SYSTEM

Combined with a main conveyor & compression conveyor, and optional SST bag top trimmer & trim remover.




T-PAK 750 WITH SUPERSEALER

Combined with SST bag top trimmer, 3" jet flow trim remover, angled bed conveyor with 3" back belt.



T-PAK 550WD DRAWING

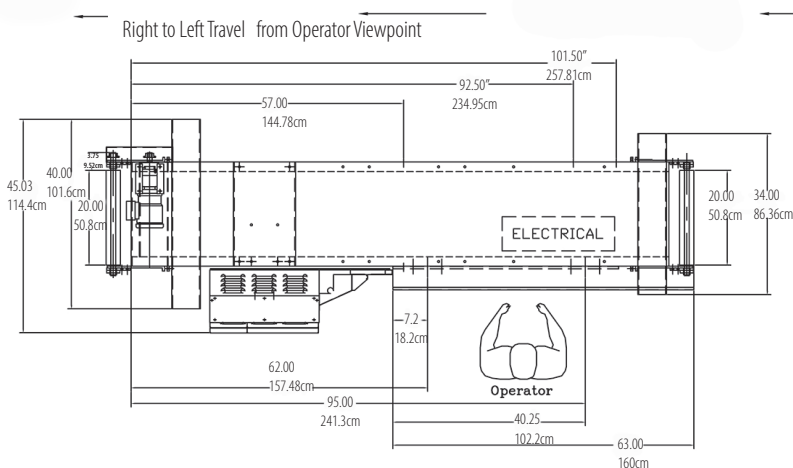

Drawing dimensions as reference ONLY.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Dedusters:** Used in dusty environments to remove dust from seal areas.

Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE, CONVEYOR & SEALER SPEED, AND SAVE RECIPE SETTINGS FOR EASY BAG CHANGEOVER

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS & LEARN MORE AT:**
OKSEALER.COM