



SUPERSEALER T-PAK 500



SUPERSEALER T-PAK 500 FLAT CONVEYOR BAGGING SYSTEM

The most customizable systems & reliable sealers on the market

The T-PAK 500 is a semi-automatic bagging system that provides a reliable and versatile bag sealing experience. This system comes equipped with a Supersealer hot-air or band sealer, a 10' long flat conveyor, optional T-PAK infeed device, SST Top Trimmer and a Trim Remover. A T-PAK 500 Bagging System is designed to seal any kind of bag material for the food, medical device or staples industry. This system can be operated by integrating automatic baggers or utilizing multiple operators on one line.

Efficient & Operator Friendly

- CHOICE OF BAND OR HOT-AIR SEALING
- OPTIMUM SEAL QUALITY & AESTHETICS
- LOW MAINTENANCE
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION



 WATCH OUR VIDEOS
& LEARN MORE AT:
OKSEALER.COM



TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Belt length:	10' or 3 meters (Other sizes upon req.)
Belt width:	16" (406mm) or 18" (457mm) (Other sizes upon request)
Speed:	Variable to match Supersealer
Machine handling:	Right to Left, or Left to Right
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic requirements:	Not required on standard config. Required with optional Jet Flow Trim remover.

FEATURES	BENEFITS
Supersealer bag sealer:	Superior performance for many years.
Manual bag presentation:	Optimum seal quality and aesthetics.
Easy lift front cover:	On-top access to all components means faster maintenance.
Motorized pedestal with locking swivel casters:	Sealer is raised and lowered for easy bag changeover and system mobility.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Dedusters:** Used in dusty environments to remove dust from seal areas.

Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE,
CONVEYOR & SEALER SPEED, AND SAVE
RECIPE SETTINGS FOR EASY BAG CHANGEOVER

OTHER AVAILABLE MODELS:



T-PAK 550 COMPRESSION BAGGING SYSTEM


T-PAK infeed,
SST bag top trimmer,
trim remover,
flat bed conveyor
& foam compression belt.



T-PAK 750 W/ SUPERSEALER

Combined with SST bag top trimmer, 3" jet flow trim
remover, angled bed conveyor with 3" back belt.

T-PAK 500 DRAWING

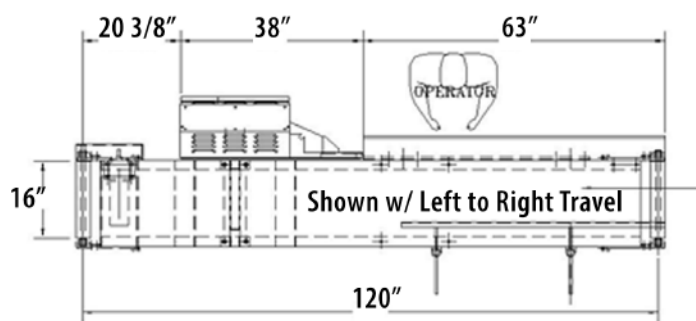

Drawing dimensions as reference ONLY.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM