



SUPERSEALER T-PAK 550-3



SUPERSEALER T-PAK 550-3 HIGH-SPEED BAGGING SYSTEM

Efficient & Operator Friendly

- CHOICE OF BAND OR HOT-AIR SEALING
- OPTIMUM SEAL QUALITY & AESTHETICS
- LOW MAINTENANCE
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION

The most customizable & reliable sealers on the market

The T-PAK 550-3 Bag Compression and Sealing System is a high quality system for increasing bag handling and sealing output. Combined with a heavy duty conveyor system with a full width compression belt and a Band Supersealer or Hot Air Supersealer, makes this an unchallenged heat sealing system for many applications. Superior in performance and speed with low maintenance cost. Our satisfied customers include the poultry, meat and textile industries.



 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM



TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Belt length:	10' or 3 meters (Other sizes upon req.)
Belt width:	16" (406mm) or 18" (457mm) (Other sizes upon request)
Speed:	Variable to match Supersealer
Machine handling:	Right to Left, or Left to Right
Electrical requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic requirements:	Not required on standard config. Required with optional Jet Flow Trim remover.
Standard features:	Product placement on the main conveyor is aided by guide and bag top guide

FEATURES	BENEFITS
Supersealer bag sealer:	Superior performance for many years.
Semi-automatic bag presentation:	Optimum seal quality and aesthetics.
Full compression belt:	Removes excess air from the bags.
Modular design with individual frame on wheels:	Mobility and easy access for maintenance.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or stationary blade.
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Automatic Infeed:** T-PAK infeed into Supersealer for high-speed conveyors.
- **Bag fillers & loaders:** OKI works with scale, augers, robotics, and automatic bag loader manufacturers to create a seamless packing line.
- **Dedusters:** Used in dusty environments to remove dust from seal areas.


Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE,
CONVEYOR & SEALER SPEED, AND SAVE
RECIPE SETTINGS FOR EASY BAG CHANGEOVER

OTHER AVAILABLE MODELS:



T-PAK 550-3 DRAWING

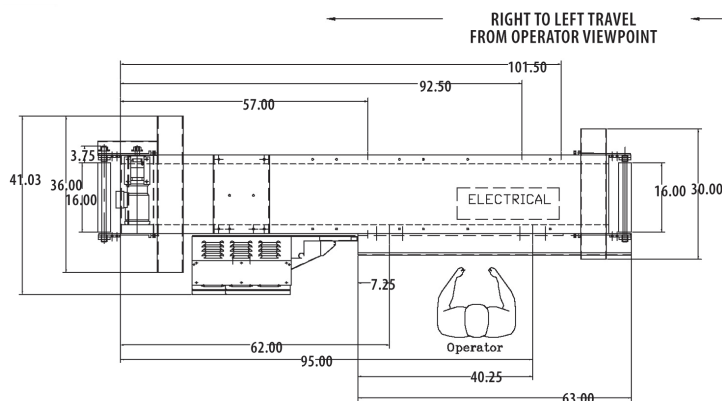

Drawing dimensions as reference ONLY.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton,
Suffolk, IP 31 2AR, England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM