



STAINLESS-STEEL SUPERSEALER WITH NET WEIGH FILLER



A filler and sealer for the best work flow.

A bag fill and seal line supports the weighed filling of material such as food, coffee, tea, electronic components, candy, grains, pills, plastic parts, seafood, seed, and pet food. The compact semi-automatic system is ideal for small or start-up companies to get their product into the market with little investment. Scales come in many different configurations, from single lane to multiple lanes with a single controller.

Advanced & Customized

- SMALL FOOTPRINT PACKING LINE
- CHOICE OF HOT AIR, OR BAND SEALER
- OPTIMUM SEAL QUALITY & AESTHETICS
- ADJUSTABLE MOTORIZED PEDESTAL
- CUSTOMIZED FOR EACH APPLICATION



 WATCH OUR VIDEOS
& LEARN MORE AT:
OKSEALER.COM



HOT-AIR TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material:	Heat sealable materials up to 10 mils
Speed:	Up to 80 ft/min (24.4 m/min)
Machine Handling:	Right to Left, or Left to Right
Seal wheel width:	1/4" (6mm) standard 3/8" (9mm) optional
Electrical Requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic Requirements:	Not required on standard config. Required with optional Jet Flow Trim remover.

BAND SEALER TECHNICAL SPECIFICATIONS:

Bag size range:	All bag sizes
Bag material range:	Heat seal materials up to 10 mils
Speed:	Up to 48 ft/min. (14.6 m/min.)
Seal width:	5/16" (8mm) up to 3/4" (19mm)
Machine Handling:	Right to Left, or Left to Right
Electrical Requirements:	110VAC, 1 PH, 60 Hz, 10 AMP or 220VAC, 1 PH, 50 Hz, 7 AMP CE Marked
Pneumatic Requirements:	Not required on standard config. Required for optional Jet Flow Trim remover

FEATURES

BENEFITS


Hot-air sealing technology:	Optimum seal quality with low maintenance.
Manual bag presentation:	Optimum seal quality and aesthetics.
Low maintenance requirement:	Consistent up-time.
Integrated design with locking swivel casters.:	Mobility and easy access for maintenance.
Stainless-steel construction:	Ideal for use in food processing plants and harsh environments.

FEATURES

BENEFITS

No tool band changeover:	Easily maintained
Variable speed:	Flexibly adjusted with speed matching conveyors
Closed loop PID temperature control:	Accurate and consistent sealing temperature
Motorized Pedestal:	With a touch of a button, height adjustments are made easily. Simplifies multiple bag/pouch applications

SUPERSEALER W/ SCALED FILLER

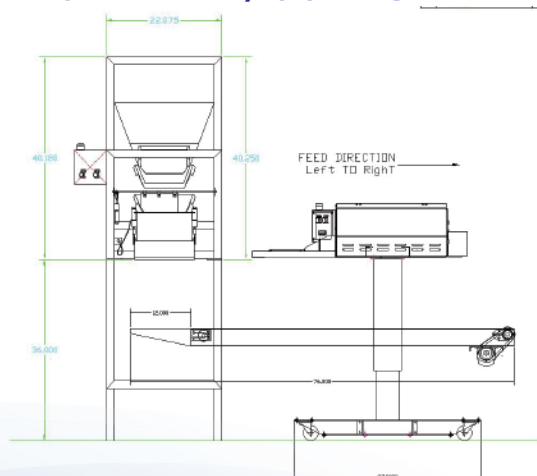

Now with Touchscreen Display

CONTROL OPERATION, TEMPERATURE, CONVEYOR & SEALER SPEED, AND SAVE RECIPE SETTINGS FOR EASY BAG CHANGEOVER

ADD-ON OPTIONS

- **Bag Top Trimmers:** Rotary blade or Stationary Blade
- **Trim Removers:** 3" (76mm), or 5" (127mm).
- **Conveyors:** Designed to meet all application requirements.
- **Dedusters:** Used in dusty environments to remove dust from seal areas.

OK International Corporation

73 Bartlett Street, Marlborough, MA 01752, USA
1-508-303-8286 | sales@oksealer.com

OK International Europe Ltd.

OK House, Shepherds Grove Industrial Estate, West Stanton, Suffolk, IP 31 2AR
England
44-1359-250705 | uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a, 2161 DB Lisse, Nederland
31-252-216250 | nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKSEALER.COM