

SUPERSEALER SB40

ROTARY CONTINUOUS BAND SEALER

OK
oksealer.com



The Supersealer SB40 Rotary Band Sealer continuously seals a wide range of bag materials at high speed and efficiency. The heavy duty SB40 stainless steel construction in combination with proven band sealing technology and operator friendly controls ensures performance in demanding applications.



OKSEALER.COM



TECHNICAL SPECIFICATIONS SUPERSEALER SB40:

Bag size range:	All bag sizes.
Bag material range:	Heat sealable materials up to 15 mils or 380 microns.
Speed:	Up to 70 fpm or 21.3 mpm
Seal width:	1/2" or 12.7mm. Optional 3/4" or 19mm.
Machine handing:	Right to left or left to right.
Electric:	110 VAC, 1 Ph, 60 Hz, 15 Amp or 220 VAC, 1 Ph, 50 Hz, 8 Amp. CE marked.
Pneumatic:	Required for optional jet flow trim remover

FEATURES

BENEFITS

Stainless steel finish:	Clean and durable, preferred in food and other industries.
Variable speed:	Output can be increased or decreased with a turn of a screw.
Motorized pedestal with mobile base:	With a touch of a button sealer head is raised and lowered for different bag sizes. Base is on casters for mobility.
Easy lift front cover.	On-top access to all components means faster maintenance.
No tool band change over:	Easy to maintain.
Variable speed:	Ease of matching conveyor speeds and flexibility.
Closed loop PID temperature control:	Accurate and consistent sealing temperature.

SUPERSEALER SB40 OPTIONS:

Bag top trimmer:	Two styles: Rotary blade or stationary blade, meeting all application requirements.
Trim removers:	3" (76mm) or 5" (127mm) Venturi sucks trim into mesh bag.
Automatic infeed:	T-PAK infeed into Supersealer for high speed conveyor systems.
Bag coders and printers:	Emboss coder or ink roll coder, up to two lines. All other coders in the market can be integrated with the Supersealer.
Conveyors:	Conveyors to meet all application requirements.
Bag fillers and bag loaders:	OKI works with their partners who manufacture scales, augers and robotics, and automatic bag loaders to create a seamless packing line.
Washdown sealer and corrosive Washdown:	Upgrades for all kinds of environments and applications.
Deduster for difficult dusty environments:	Removes dust that creates barriers for sealing from seal area so that bag can be sealed.

OTHER AVAILABLE MODELS:

SUPERSEALER SS4

SS4 (Left to Right)

base with casters and motorized pedestal with optional M-500 conveyor.




SUPERSEALER SB30

SB30 (Left to Right)

Base with Casters & Motorized Pedestal with Optional BBY-200 Conveyor



Supersealer SB40 with Electric Stand drawing.

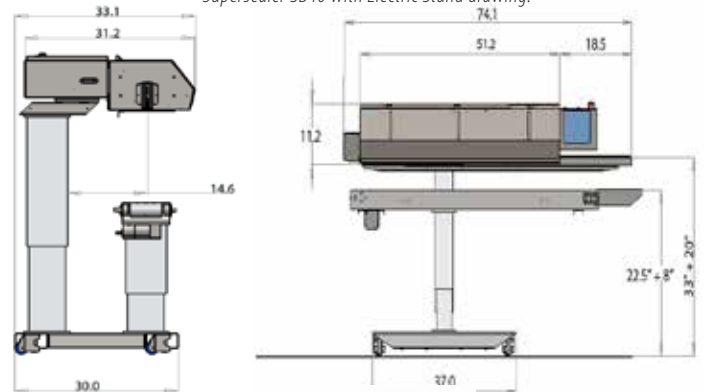

OK International Europe Ltd.
OK House
Shepherds Grove Industrial Estate West
Stanton, Suffolk, IP 31 2AR
England
44-1359-250705
44-1359-250165
sales@okiuk.com



OK International Corporation
73 Bartlett Street
Marlborough, MA 01752
USA
508-303-8286
sales@oksealer.com